

FIG. 1

1000170 92045260

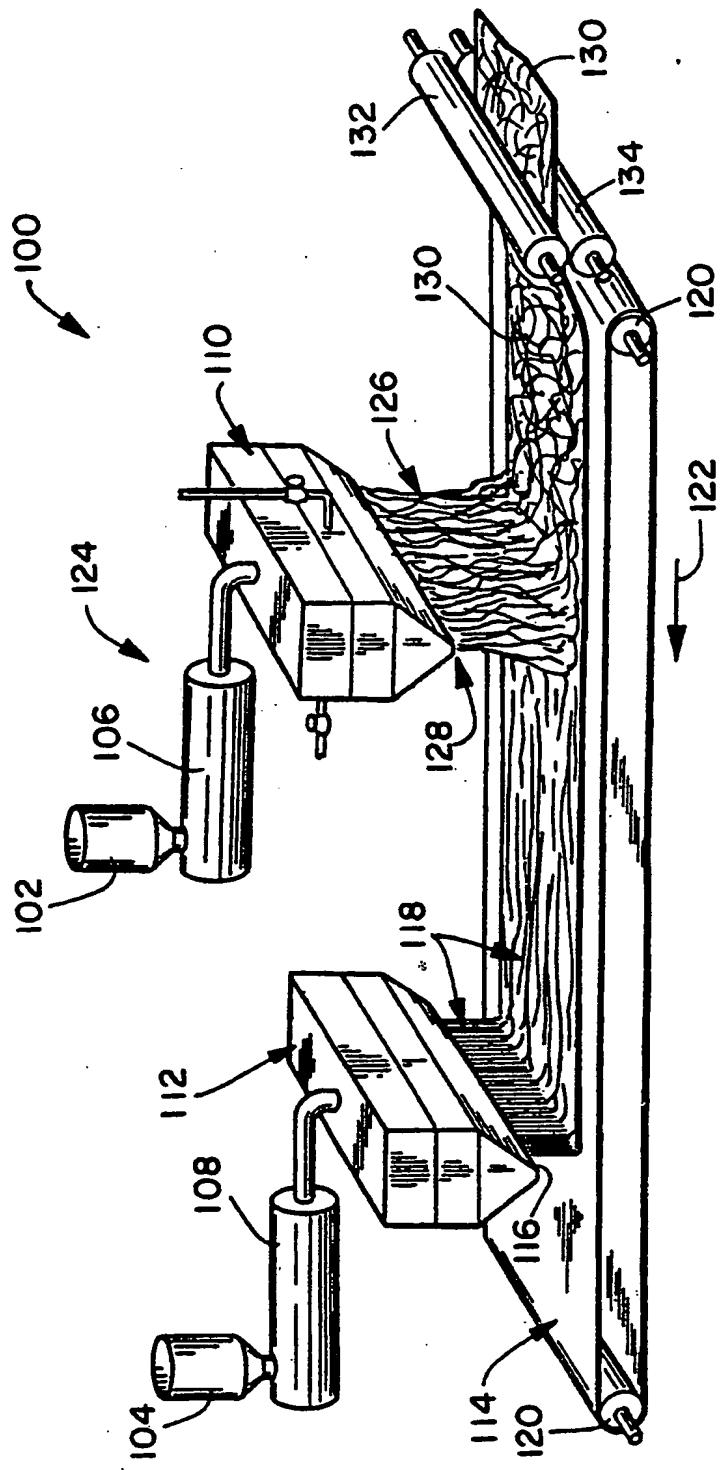


FIG. 2

0540026-010304

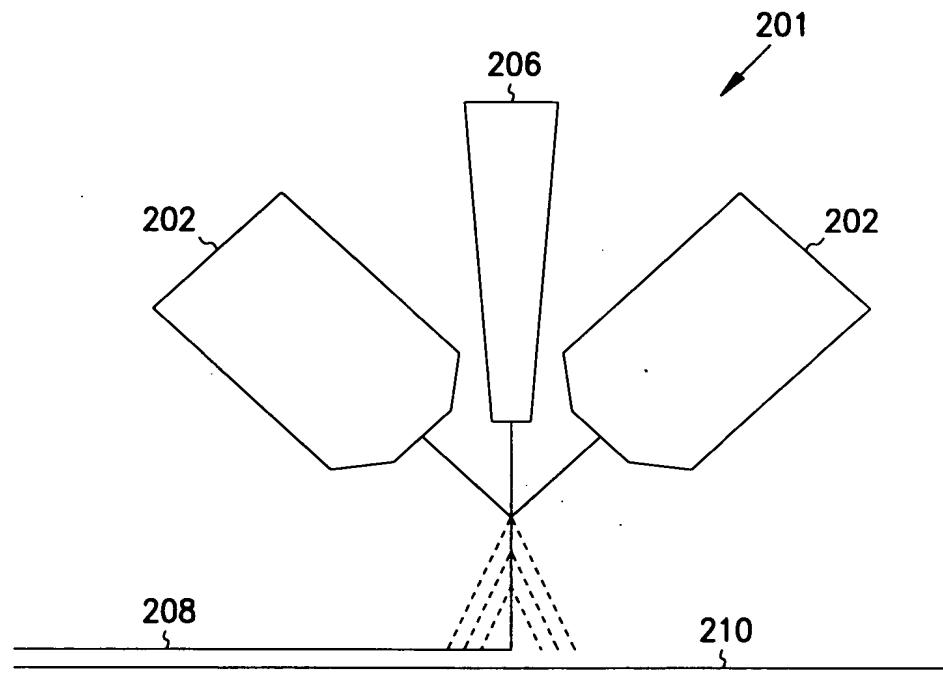
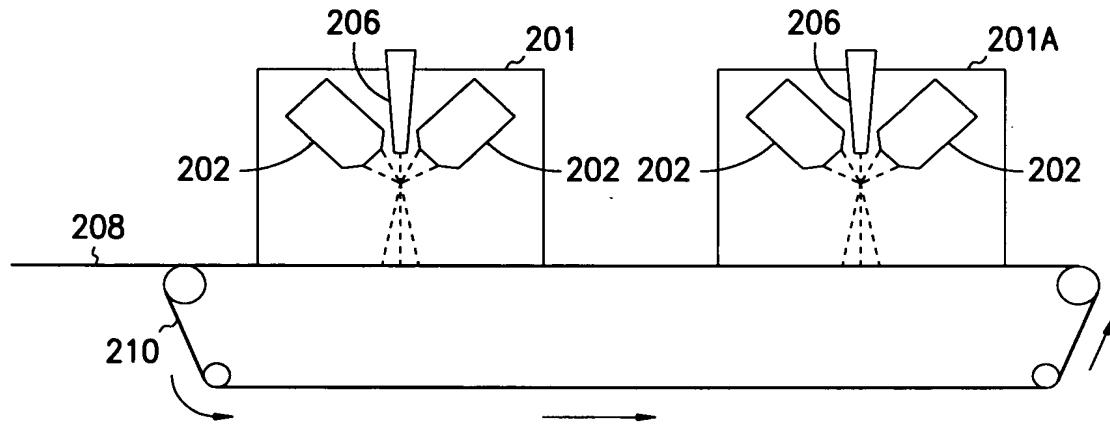


FIGURE 4 FIGURE 60

Figure 4
Heat Activation Unit


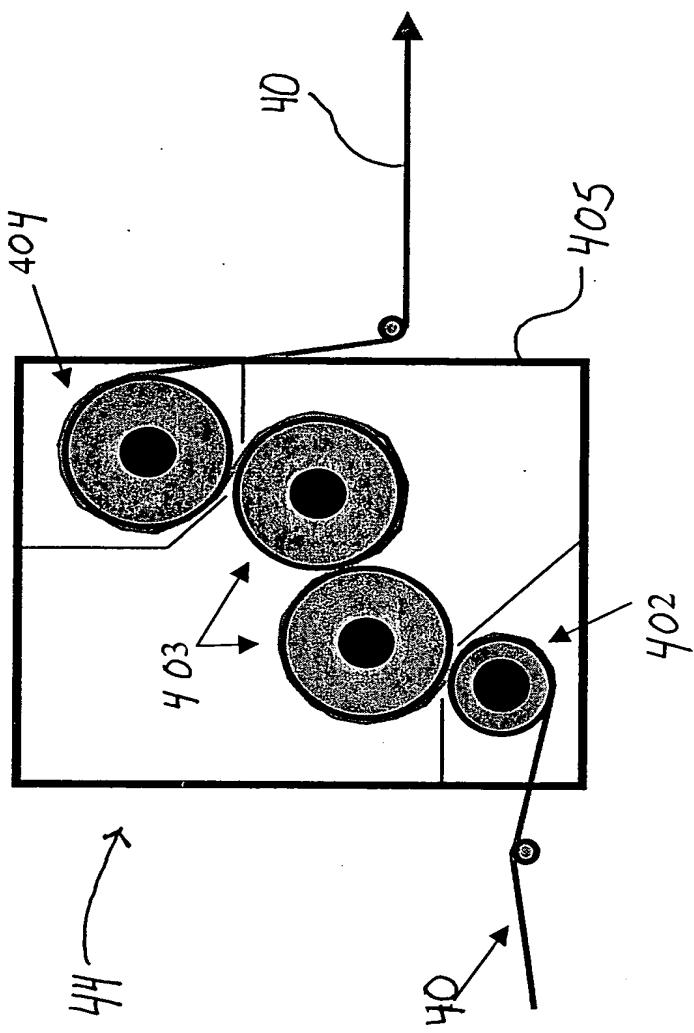


FIG. 5

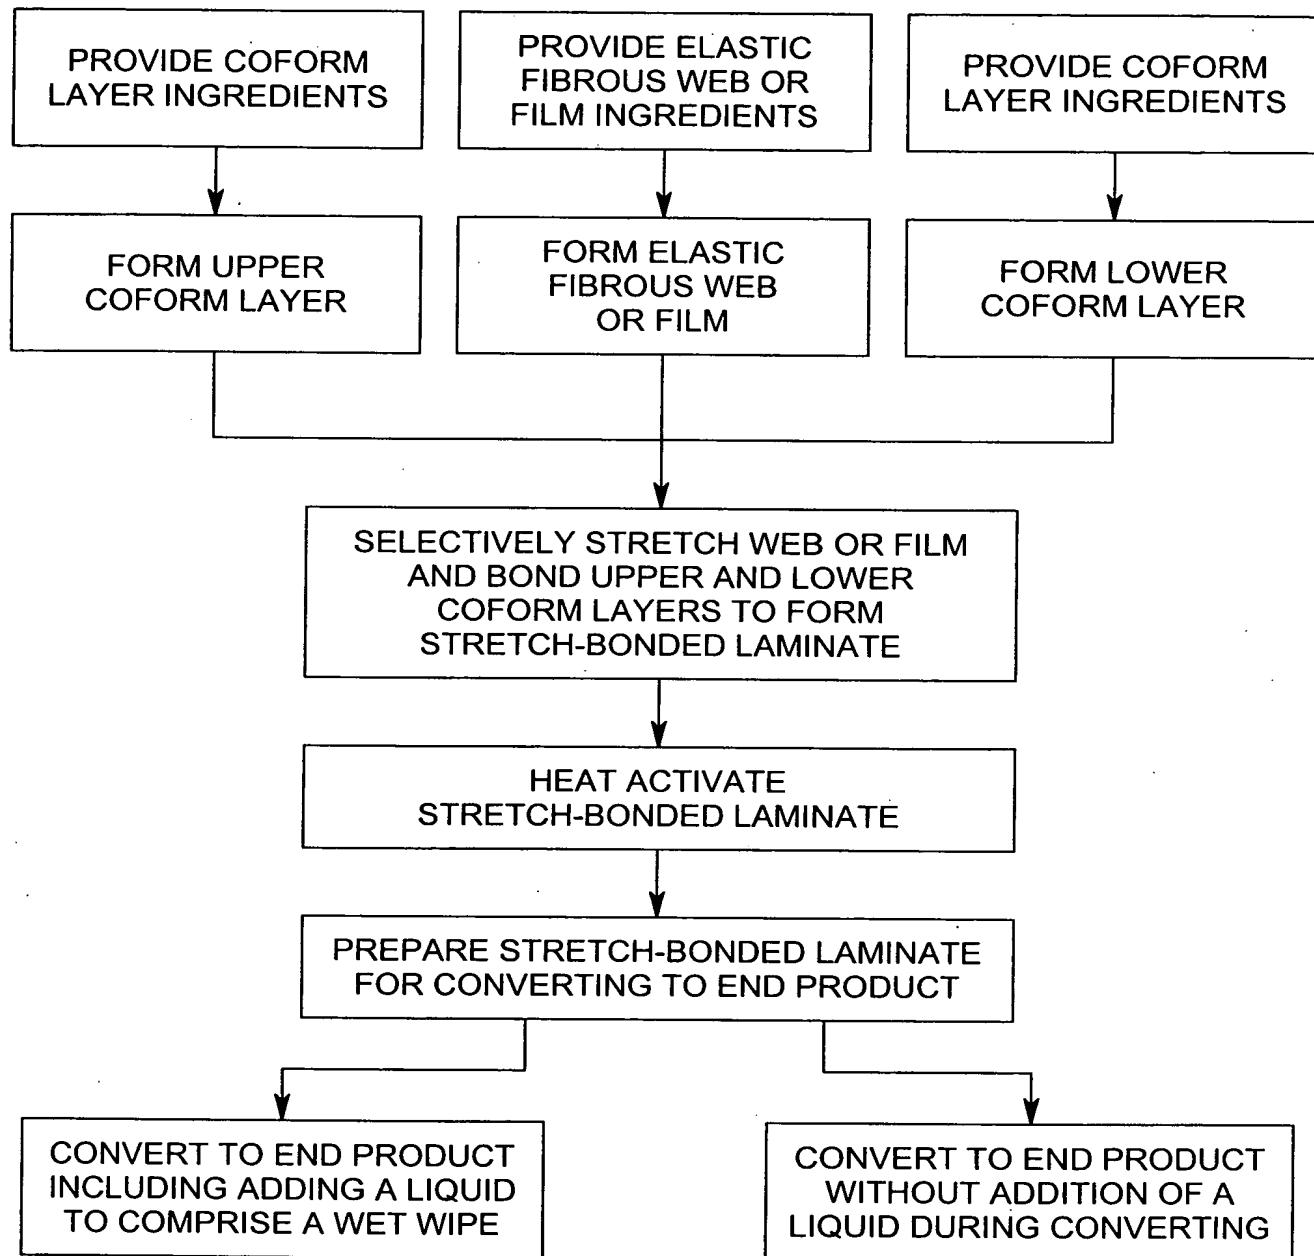

0954026.010301

TOP TO " 920415660

PRODUCT COMPARISON

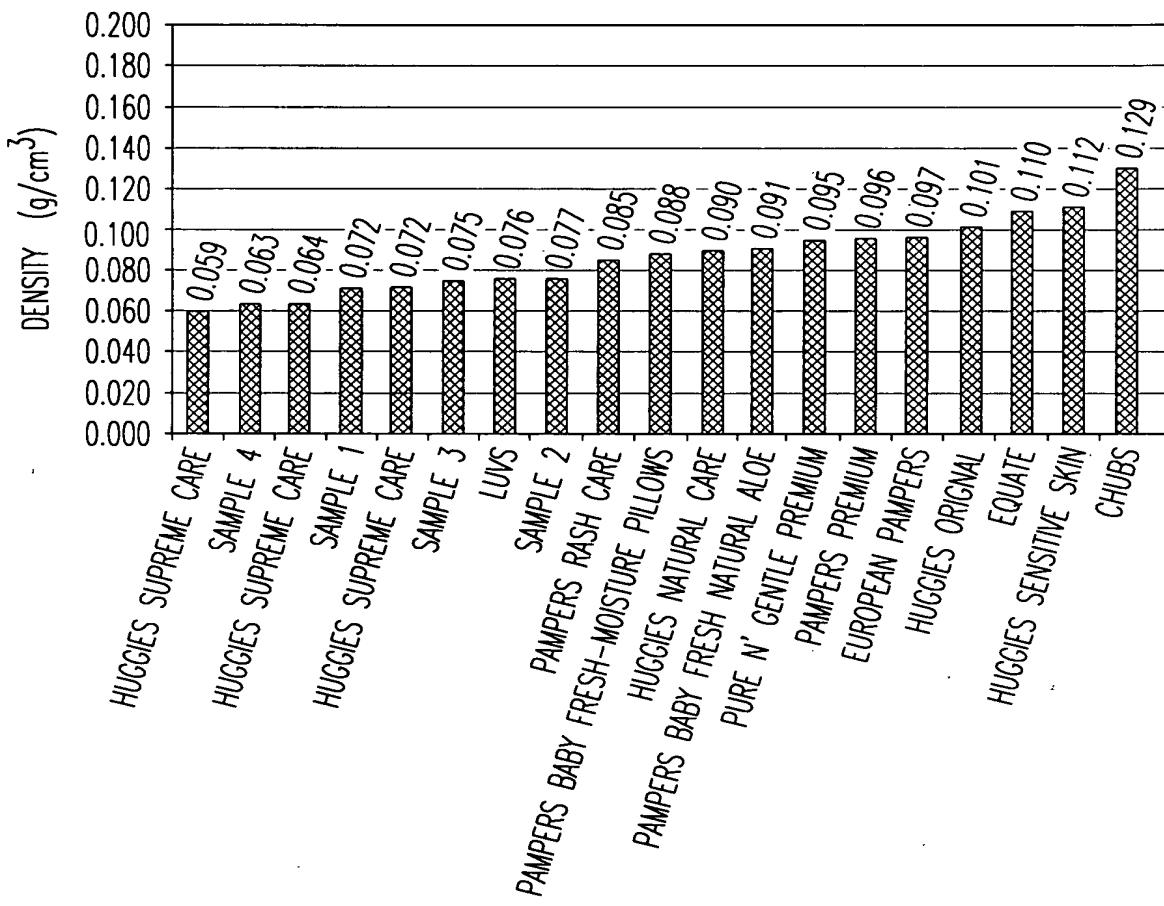


FIG. 6

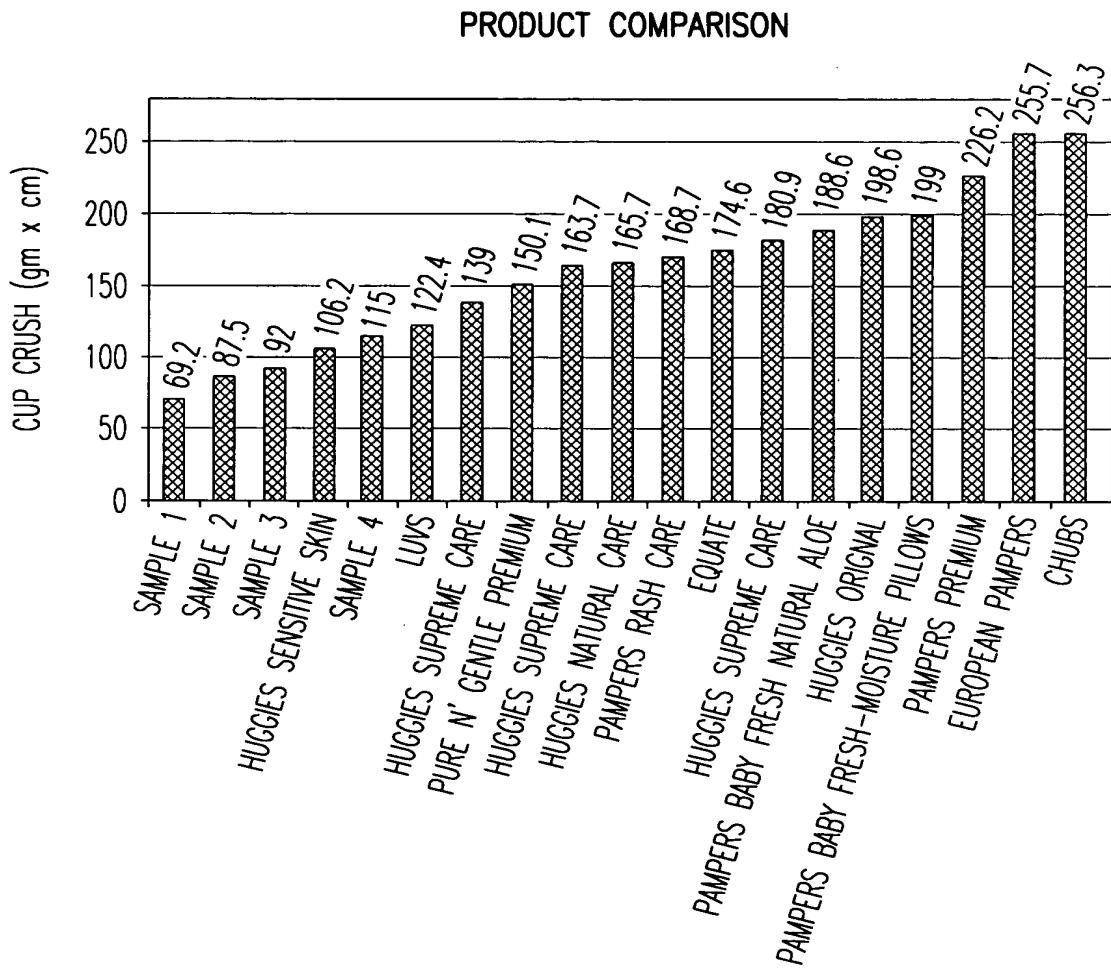


FIG. 7

PRODUCT COMPARISON

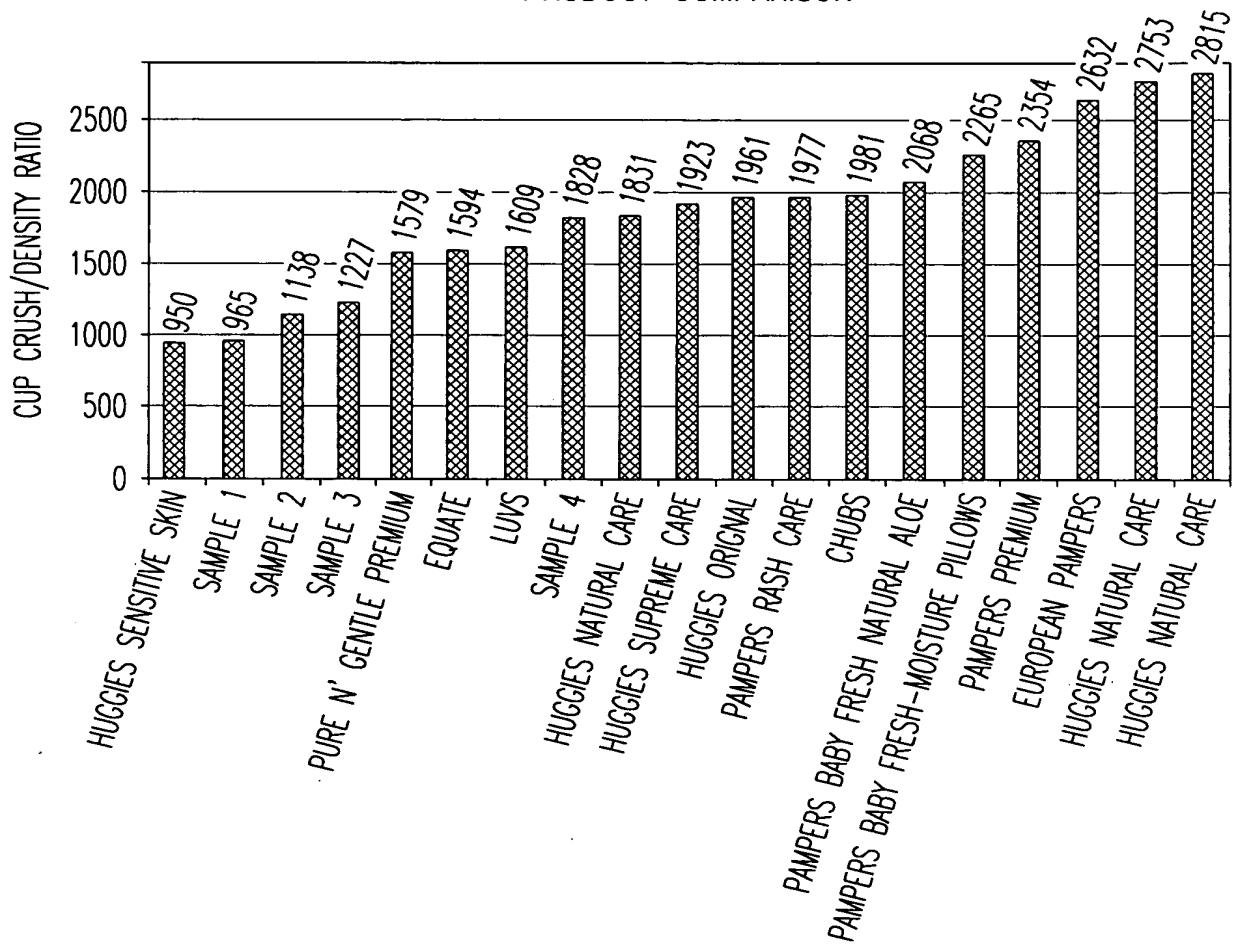


FIG. 8

FIG 9 TENSILE STRENGTH

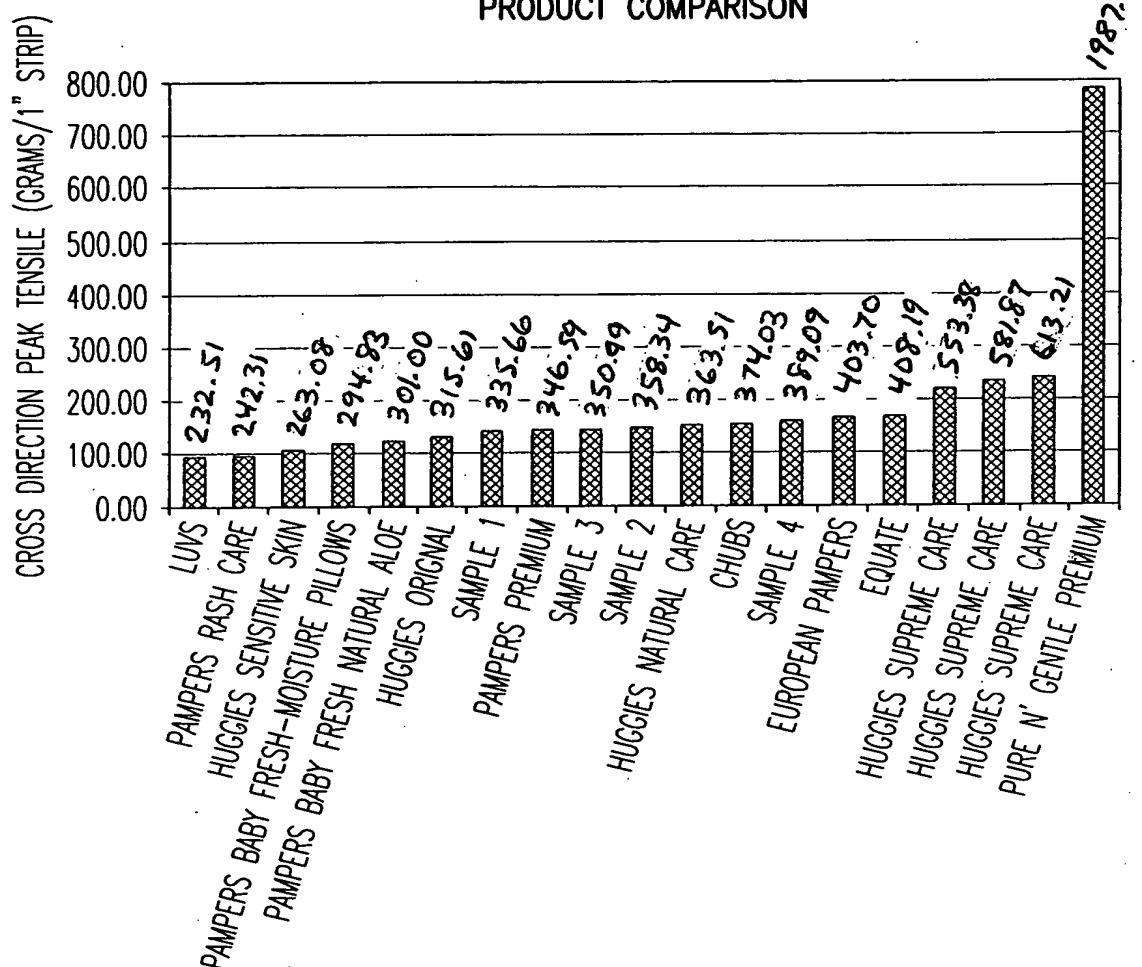
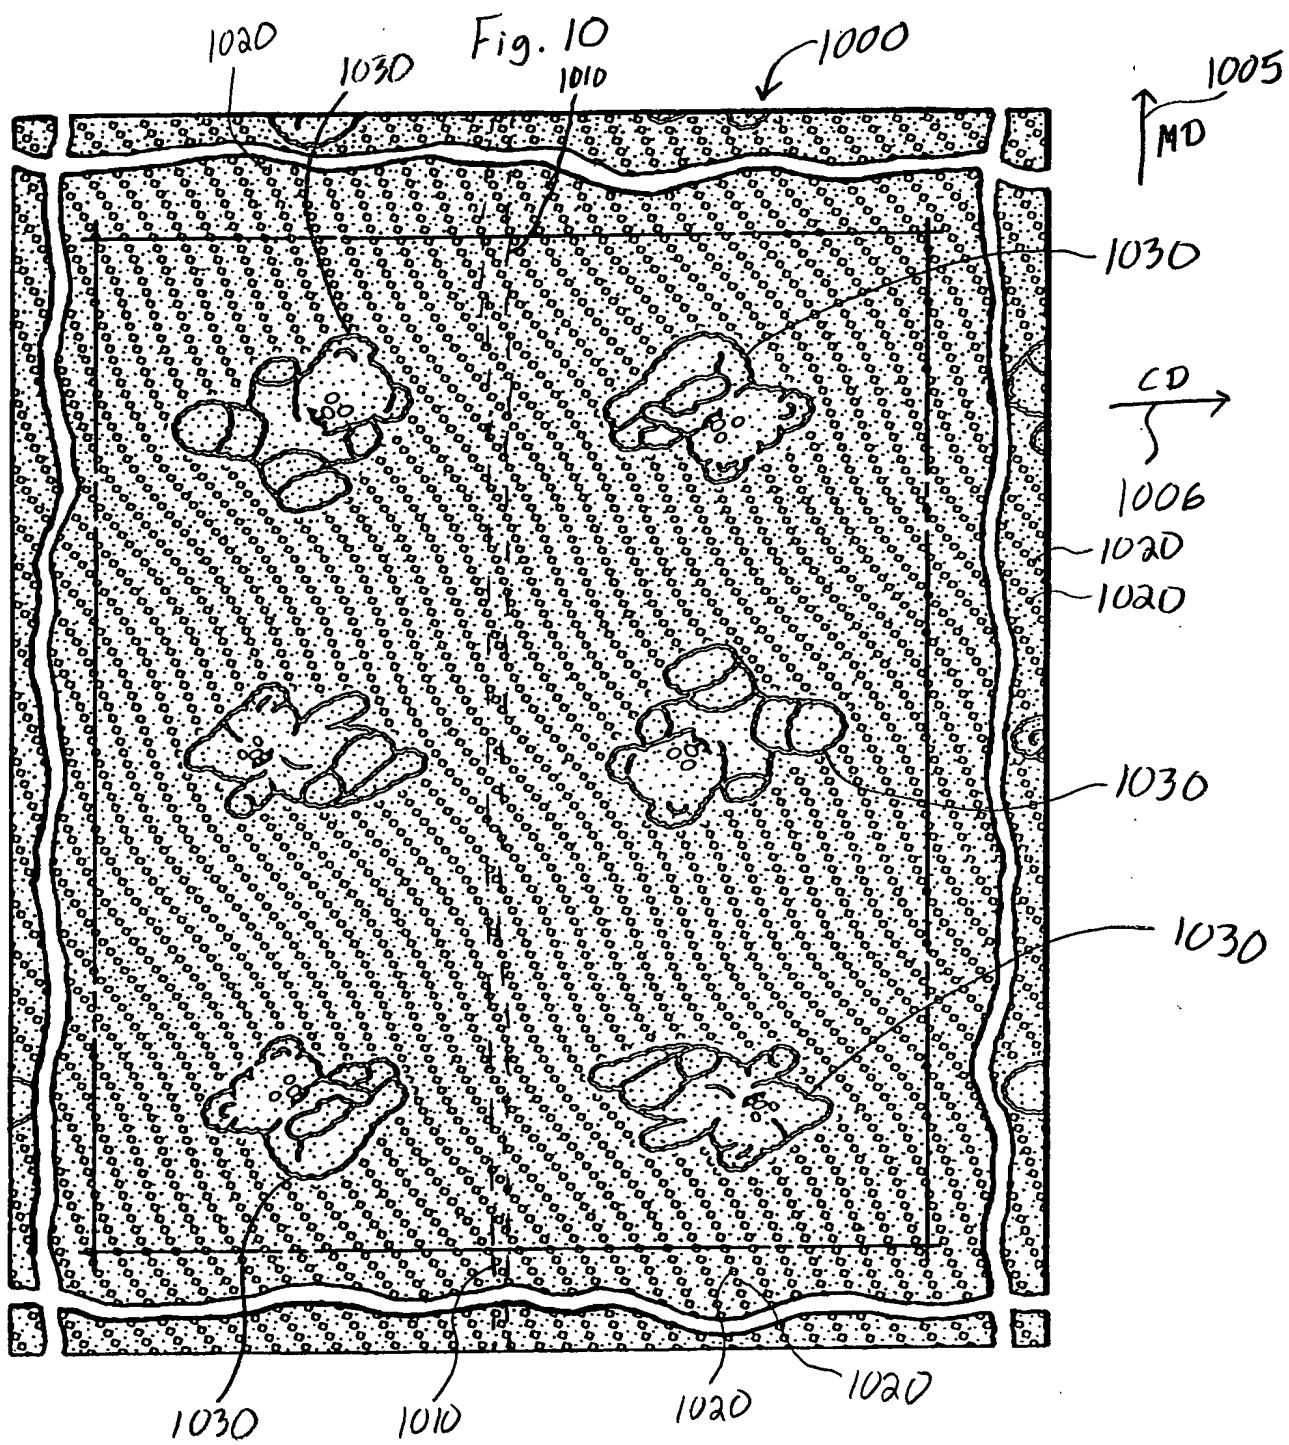


FIG. 9

09/25/2026.010304



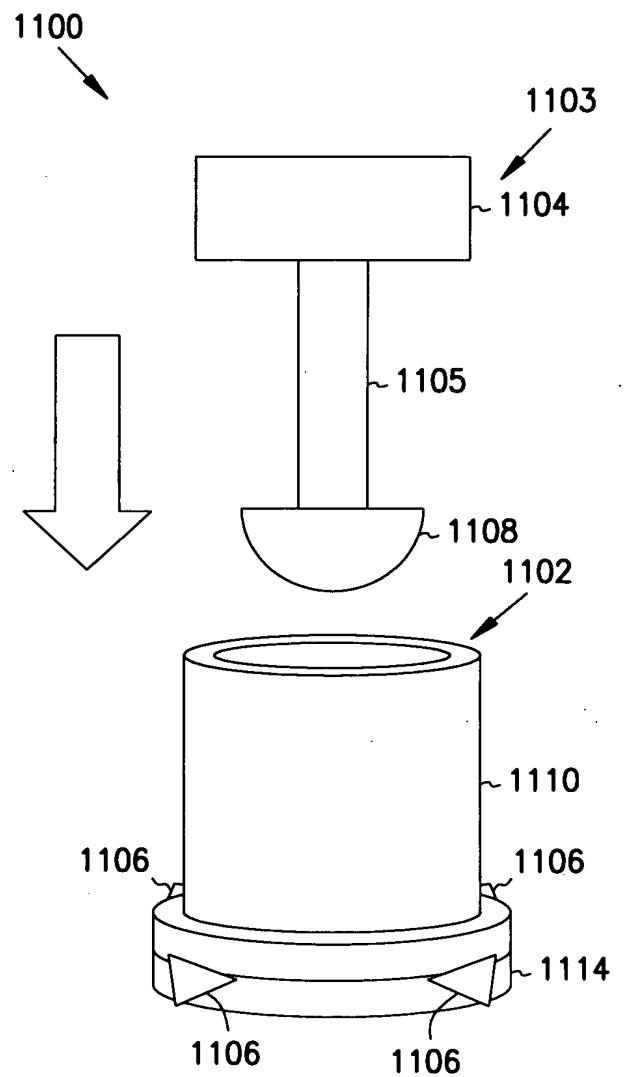


FIG. 11

03254006-040604

0052045260 - 04032024

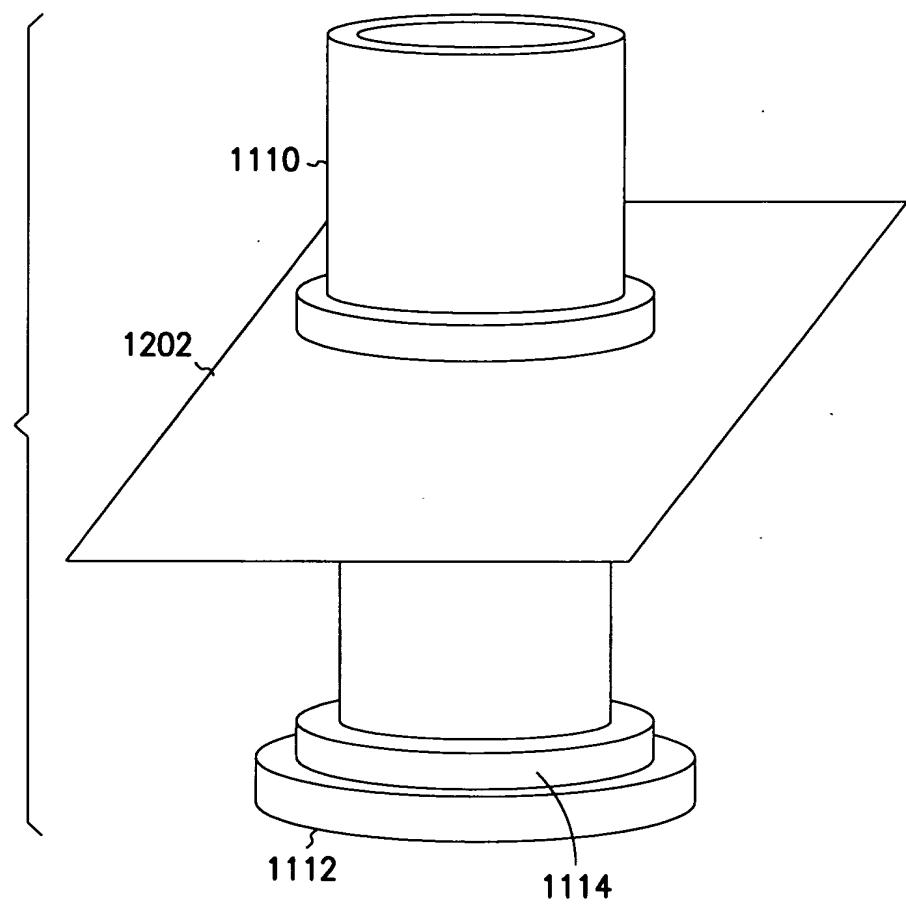
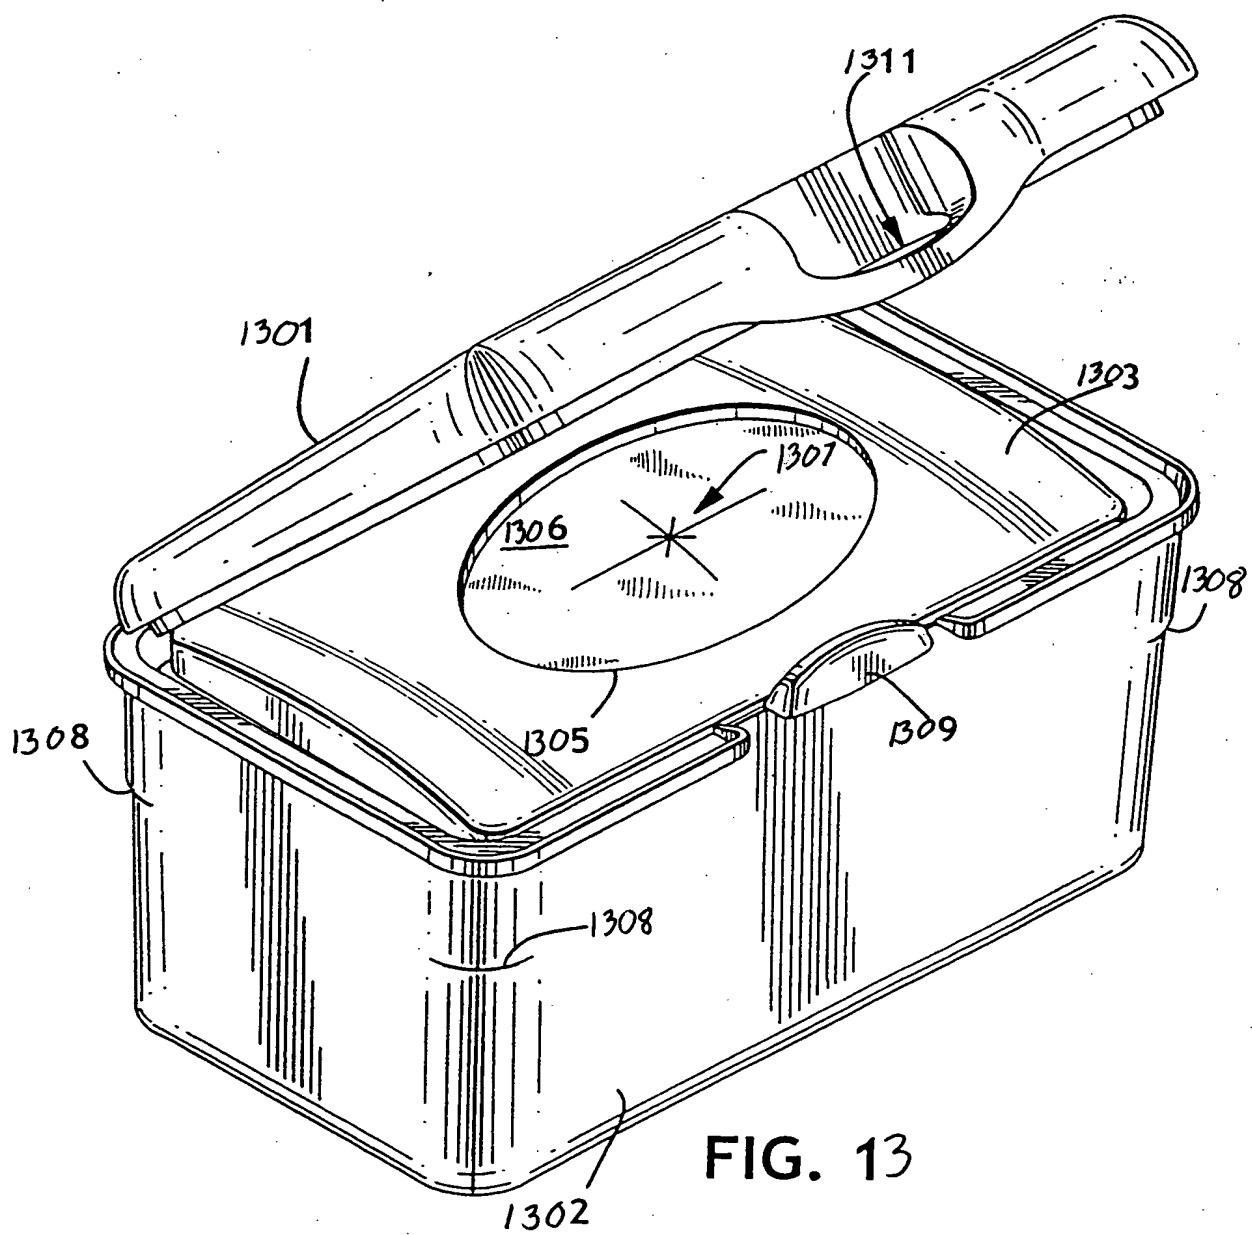


FIG. 12

FIG. 13 - 920440990




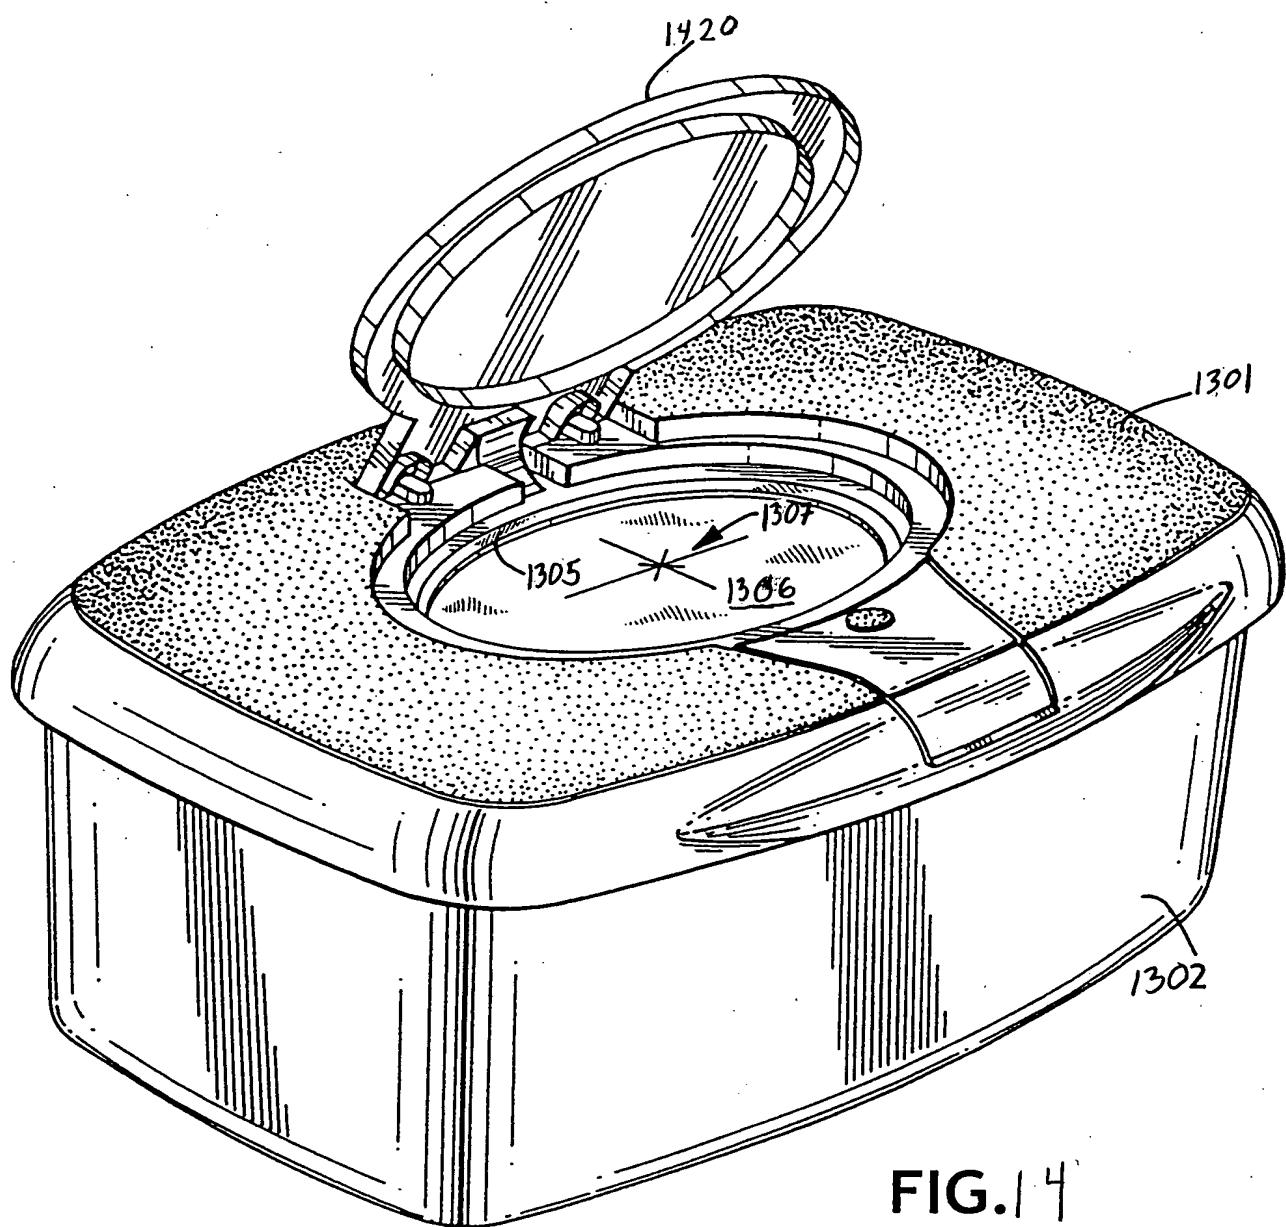


FIG. 14

09754026.010301

FIG. 15

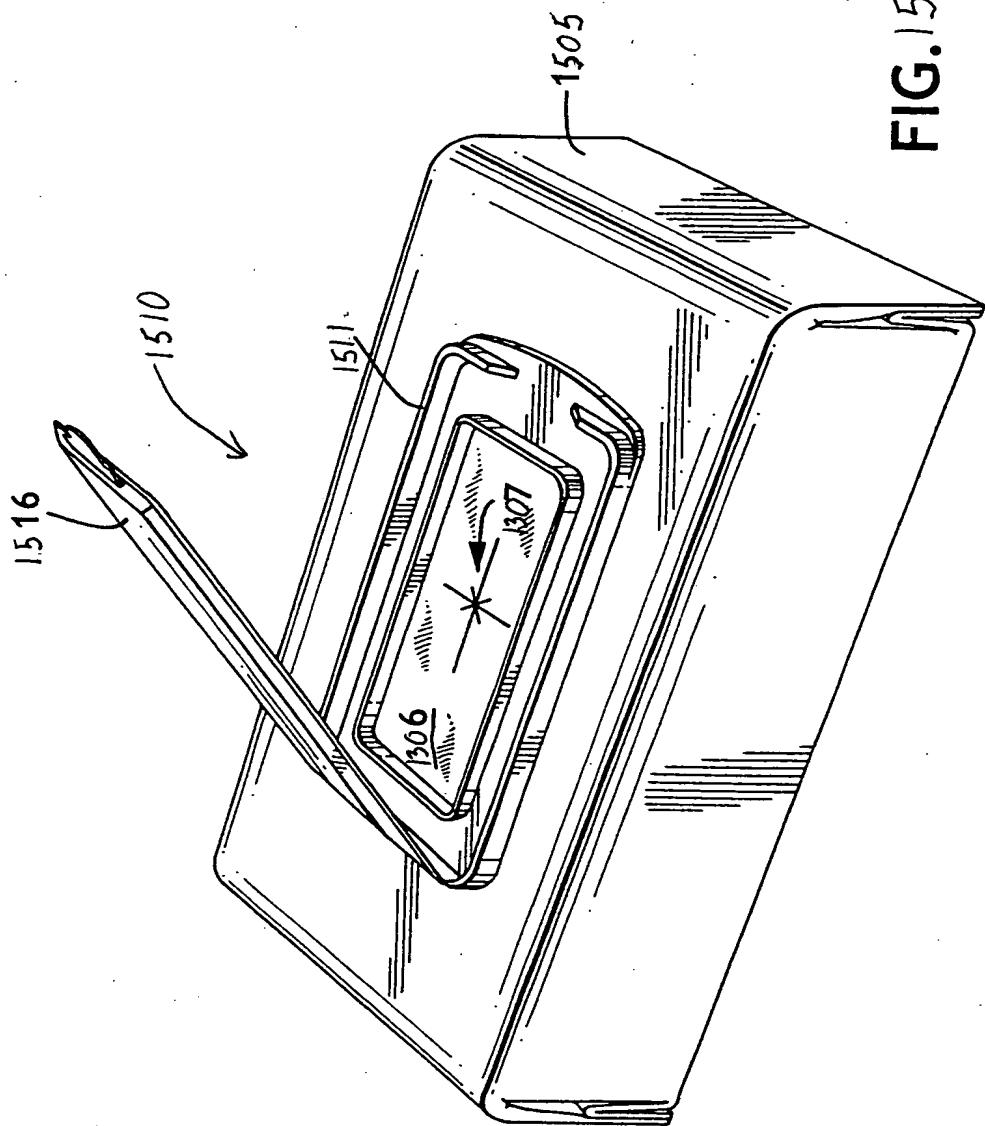

009254026 - 010300

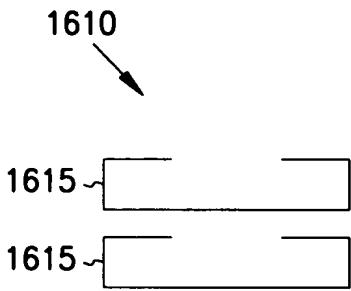


FIG. 16A




FIG. 16B

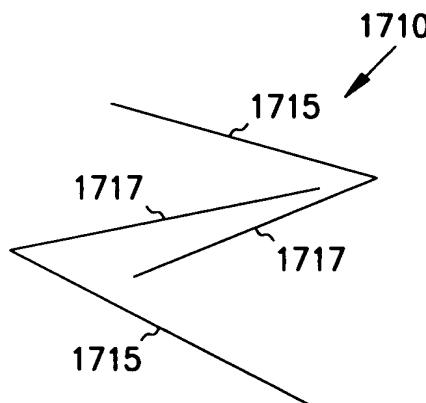


FIG. 17A

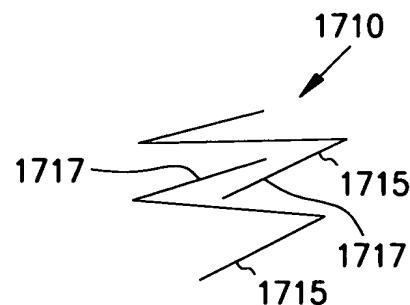


FIG. 17B

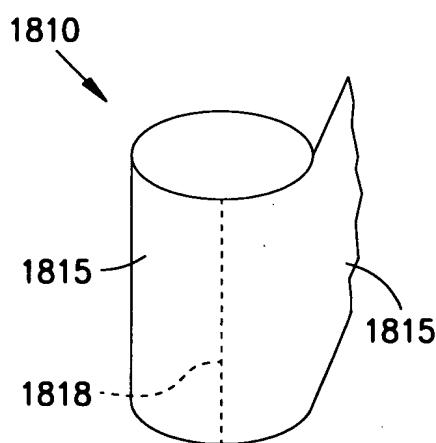


FIG. 18

F000470 "92045260

EFFECT OF DISPENSING ON WET THICKNESS

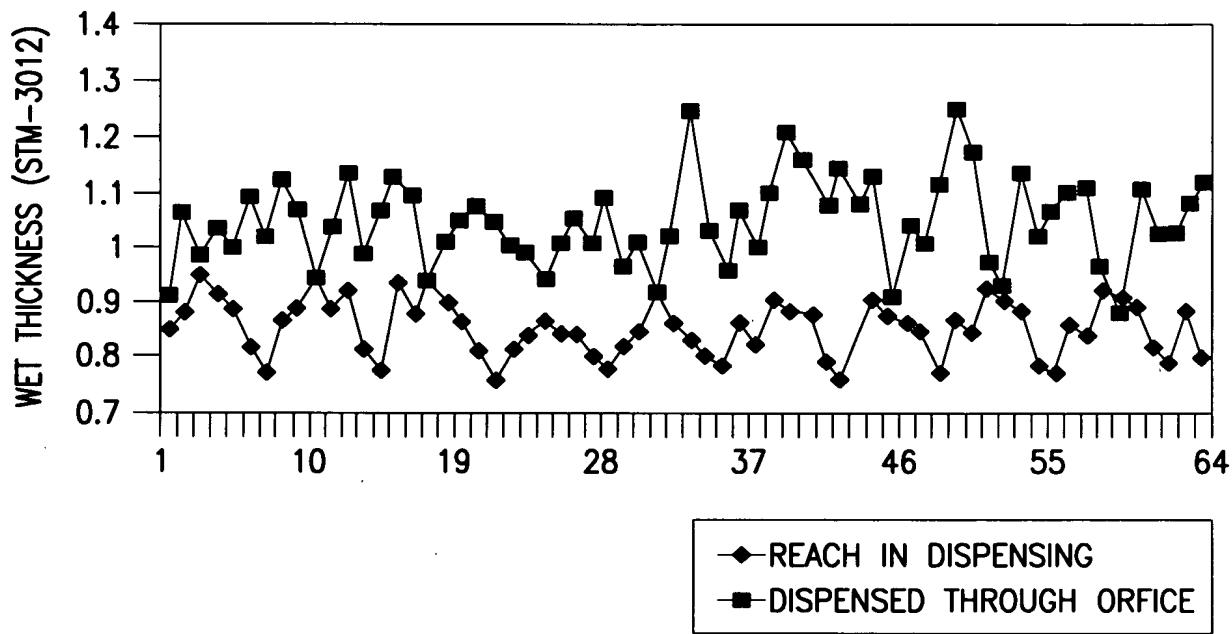


FIG. 19